


STANDARD HOOK ASSEMBLY  
CONTACT ELECTROLIFT'S  
SALES DEPARTMENT FOR  
OTHER OPTIONS.

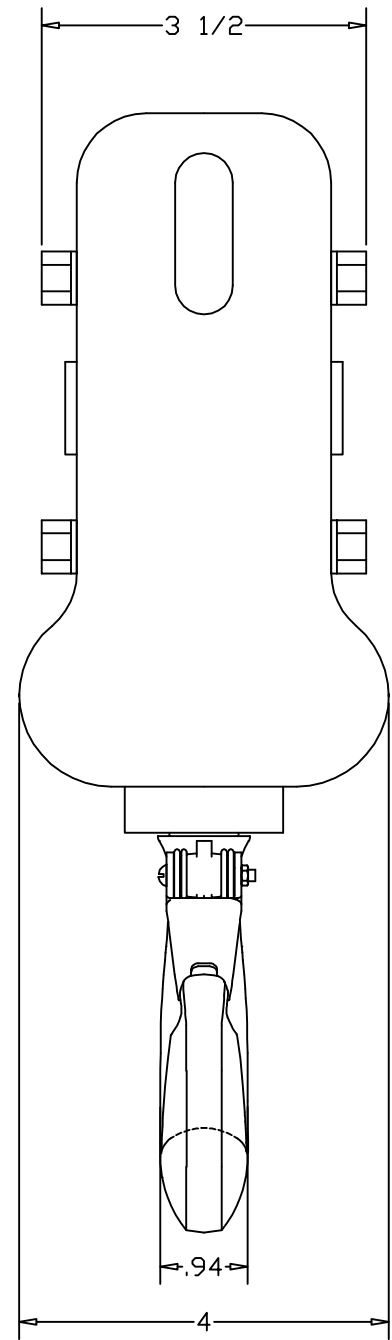


# CAPACITY 3000 LBS.

FACTOR OF SAFETY  
5 TO 1 MINIMUM

**SPECIFICATIONS:**

- 1. WIRE ROPE:**  
FOR USE WITH 1/4" OR 5/16"  
DIAMETER WIRE ROPE
- 2. SHEAVES:**  
QUANTITY = 1  
PITCH DIAMETER = 5"  
MATERIAL =  
 FOR STANDARD DUTY:  
CAST IRON SHEAVE  
WITH BRONZE BEARING  
  
 FOR HEAVY DUTY  
(UPON REQUEST):  
STEEL SHEAVE WITH  
BRONZE BEARING
- 4. HOOK ASSEMBLY PART NUMBER:**  
P531P8 HOOK ASSEMBLY MADE  
FROM CROSBY S-319CN 2 TON  
CARBON HOOK PART #1028532
- 5. WEIGHT:**  
23 LBS



ELECTROLIFT, INC.  
204 SARGEANT AVE.  
CLIFTON, NJ 07013  
PH: 973-471-0204  
FAX: 973-471-2814  
www.electrolift.com

REV.	ECO#	DATE	BY:
STANDARD HOOK BLOCK:			
M1046A			
DATE:	SCALE:	DWG SIZE:	DRAWN BY:
2/26/08	1/2	A	DR

DRAWING NO:  
M1046A-WPDF