

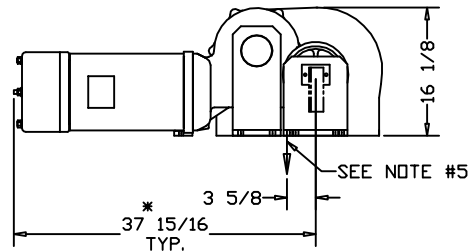


HOIST MOUNTING DETAIL
HOLE LOCATIONS

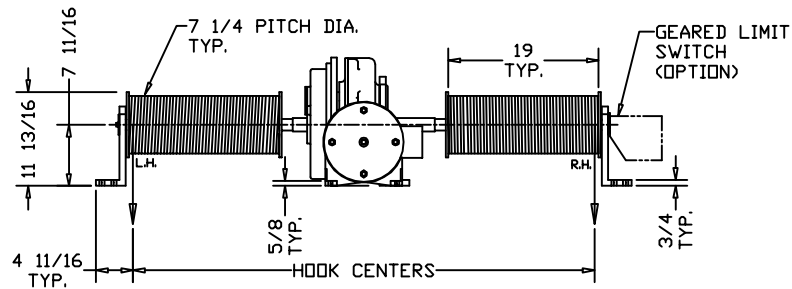

*ALLOW 6" CLEARANCE
TO SERVICE BRAKE




M-1046-A HOOK BLOCK
3000 LB. CAPACITY
5" PITCH DIA.
(2) SUPPLIED PER HOIST STD.
SHIPPED LOOSE

CUSTOMER:

REFERENCE NO.:

ELECTROLIFT AUTHORIZED DISTRIBUTOR:

DRAWING NO.:

| | | CATALOG # | | |
|--|------------------------|---|-----------|---|
| | | 924-FL | - | - |
| SPEED (FPM): | 30 | - | - | - |
| HP: | 6-1/2 | - | - | - |
| MAX. HOOK CENTERS (IN.): (SEE NOTE #4) | 71 | - | - | - |
| LIFT (FT.): | 58 | | | |
| CAPACITY (LBS): | 4000 | | | |
| PRIMARY VOLTAGE: | 460 or 230 (3 PH. STD) | | | |
| CONTROL VOLTAGE: | 115 (STD) | | | |
| HOIST WEIGHT (LBS): | 1050 | | | |
| REEVING: | 2 PART SINGLE | | | |
| HOIST NOTES: | | | | |
| 1. STANDARD CONTROL BOX WILL BE SHIPPED LOOSE WITH HOIST, TO BE MOUNTED BY CUSTOMER. | | | | |
| 2. CONTROL BOX SIZE TO BE DETERMINED UPON CONTROLS SELECTION AT TIME OF ORDER. | | | | |
| 3. ALL ELECTRICAL CONNECTIONS BETWEEN HOIST AND CONTROL BOX TO BE COMPLETED BY CUSTOMER, UNLESS OTHERWISE SPECIFIED. | | | | |
| 4. FOR HOOK CENTERS LARGER THAN SPECIFIED MAXIMUM VALUE (SEE ABOVE), CONTACT ELECTROLIFT. | | | | |
| 5. WIRE ROPE CAN PAY OFF OPPOSITE SIDE OF DRUM, IF SPECIFIED. | | | | |
| 6. FOR SINGLE LINE APPLICATIONS, SPEED AND LIFT WILL BE TWICE THE SPECIFIED VALUE AND THE CAPACITY WILL BE HALF THE SPECIFIED VALUE. | | | | |
| 7. WIRE ROPE DEAD ENDING TO BE PROVIDED BY CUSTOMER | | | | |
|  | | ELECTROLIFT, INC. 204 SARGEANT AVE. CLIFTON, NJ 07013 PH: 973-471-0204 FAX: 973-471-2814 www.electrolift.com | | |
| | | | | |
| REV. | ECO# | DATE | BY: | |
| HOIST TYPE: | | "BC-4P" TWIN HOOK | | |
| CONFIGURATION: | | FLOOR MOUNTED | | |
| DATE: | SCALE: | DWG SIZE: | DRAWN BY: | |
| 8/24/04 | 1:16 | B | AR | |
| CATALOG NO.: | | DRAWING NO.: | | |
| 924-FL | | BC-132 | | |