


*ALLOW 6" CLEARANCE TO SERVICE BRAKE

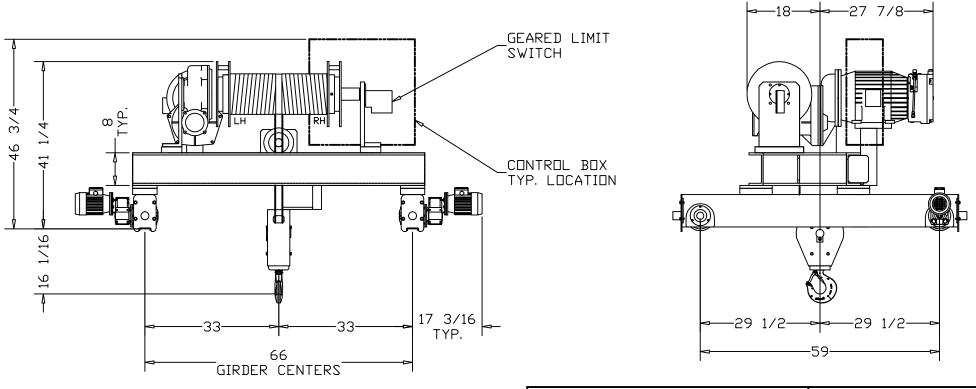

CATALOG #	SPEED (FPM):	LIFT (FT):			
D5T2025	20	25			
_	-	-			
_	_	_			
_	_	_			
_	_	_			
_	_	_			

CAPACITY (LBS): 10,000 LBS

REEVING: 2 PART DOUBLE

PRIMARY VOLTAGE: 460 or 230 (3 PH. STD)

CONTROL VOLTAGE: 115 (STD)


HOIST WEIGHT (LBS): 4000 HP: 10 HP

WHEEL LOADINGS (LBS PER WHEEL):

LEFT SIDE		RIGHT SIDE		
DRIVE	IDLER	DRIVE	IDLER	
3640	3600	3380	3380	

HOIST NOTES:

- 1. SPECIFIC CONTROL BOX LOCATION WILL BE DEFINED UPON CONTROLS SELECTION AND APPLICATION SPECIFIC CLEARANCE ISSUES
- 2. CHANNEL SIZE MAY INCREASE AS GIRDER CENTERS BECOME LARGER



ELECTROLIFT, INC. 204 SARGEANT AVE. CLIFTON, NJ 07013 PH: 973-471-0204 FAX: 973-471-2814 www.electrolift.com

ECO#	DATE	BY:
	ECO#	ECO# DATE

HOIST TYPE:

'D' SINGLE HOOK

CONFIGURATION:

TOP RUNNING

DATE:	SCALE:	DWG SIZE:	DRAWN BY:
4/19/13	1/25	В	AR
CATAL DC ND	DDAY/TMG	NO.	

CATALOG NO.: DRAWING NO.:

D5T2025

TR - 100

CUSTOMER:

ELECTROLIFT AUTHORIZED DISTRIBUTOR:

REFERENCE NO.: