

Reference Electro Lift M-12564

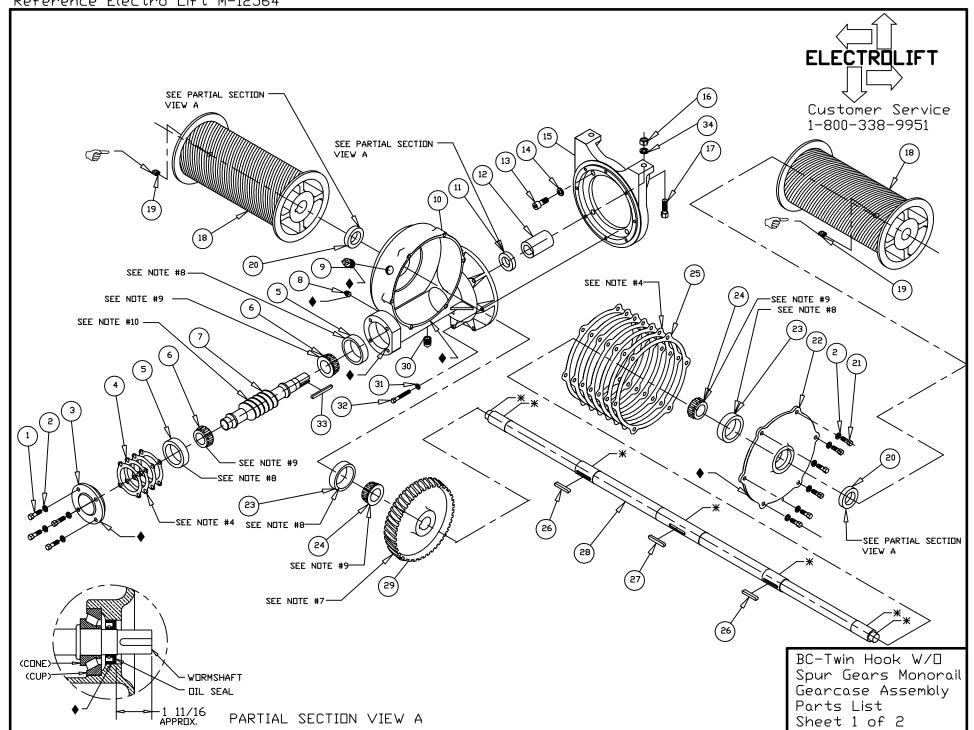

34	FS323	2	WASHER, L, 1/2	SEE N□TE A		
33	K10849P3	1	KEY, 5/16×5/16, 2-15/16			
32	FS127	7	SCREW,HHCS,5/16-18×2-1/4, GR2,PLAIN	≫SEE NOTE A		
31	FS312	7	WASHER,L,5/16, PLAIN	≫SEE NOTE A		
30	FS333	1	PIPEPLUG,1/2 SQHD CORED,CI PLAIN	SEE N□TE A		
29		1	WORM WHEEL, JOB SPECIFIC, SEE NOTE #5			
28		1	DRUM SHAFT, JOB SPECIFIC			
27	K10910P4	1	KEY,1/2×1/2×1-15/16,C:BC WORM WHEEL			
26	K10849P5	2	KEY, 5/16×5/16, 2, A:B DRUM SHAFT			
25	K10755	1	KIT, SHIM, B-HOIST, SIDE COVER			
24	DM7009	2	BEARING, TRB, CONE, 2.25 ID	⊠SEE N□TE B		
23	DM7010	2	BEARING, TRB, CUP 4.25 DD	⊠SEE N□TE B		
22	M1310A	1	COVER, SIDE, GEAR CASE, BC			
21	FS129	6	SCREW,HHCS,3/8-16x1, GR2,PLAIN	SEE N□TE A		
20	DM7031	2	SEAL, SHAFT, 2.25 ID, 3.35 OD	SEE N□TE C		
19	FS445	2	SOCKET HEAD SET SCREW, 3/8-16×1/2, KNURLED			
18		2	DRUM, JOB SPECIFIC			
17	FS401	2	SCREW,HHCS,1/2-13×1-3/4,GR2	SEE NOTE E		
16	FS255	2	NUT,HEX,1/2-13, GR2,PLAIN	SEE NOTE E		
15	M2959	1	ADAPTER, MOTOR, T477, C FACE			
14	FS320	4	WASHER,INT.TOOTH,1/2,PLATED	SEE N□TE A		
13	FS207	4	SCREW,SHCS,1/2-13×1-1/4	SEE N□TE A		
12	K122P2	1	SLEEVE, MOTOR SHAFT, B HOIST			
11	DM7030	1	SEAL, SHAFT, 1.18 ID, 2.06 OD	⊠SEE N□TE C		
10	T477A	1	GEAR CASE, BC-TH W/O SPUR GEARS			
9	FS337	1	PIPEPLUG,1/2 SQHD CORED,W/STRAIGHT VENT	SEE N□TE A		
8	FS336	1	PIPEPLUG,1/8 SQHD,CAST IRON, SOLID	SEE N□TE A		
7		1	WORM SHAFT, SEE NOTE #5			
6	DM7006	2	BEARING, TRB, CUP, 3.125 DD	≫SEE NOTE B		
5	DM7005	2	BEARING, TRB, CONE, 1.25 ID	≫see note b		
4	K10756	1	KIT, SHIM, B-HOIST, END COVER			
3	K123	1	COVER, END, GEAR CASE, B			
2	FS315	10	WASHER,L,3/8, PLAIN	≫SEE NOTE A		
1	FS130	4	SCREW,HHCS,3/8-16x1-1/4, GR2,PLAIN	≫SEE NOTE A		
ITEM #	PART #	QTY	DESCRIPTION			
	BILL OF MATERIALS					

## NOTES:

- 1) \* APPLY ANTISEIZE COMPOUND
- 2) ♦ SEE LAST SHEET FOR LOCTITE SEALANT AND GASKET APPLICATION INSTRUCTIONS.
- 3) P APPLY BLUE TYPE
  THREADLOCK COMPOUND,
  TORQUE TO 24 FT-LBS





5) IDENTIFICATION CHART

NO OF TEETH	WORM WHEEL P/N	WORM SHAFT P/N	
36	M336A	M320	
41	M12207A	M2851	
67	M2864A	M2853	

- 6) DIL CAPACITY 20 DZ.

  EXXDN CYLESSTIC TK680 DR EQUIV. E/L P/N DM7146

  DR MDBIL SHC 634 DR EQUIV. (SYNTHETIC) E/L P/N DM7381
- 7) PRESS ITEM 25 ONTO ITEM 28 CENTRALLY LOCATED ON ITEM 26
- 8) PRESS ITEM INTO MATING HOUSING OR COVER
- 9) TO BE PRESSED ON MATING SHAFT
- 10) TAP WITH MALLET AFTER PRESSING ITEM 5
- A) THIS PART CAN ONLY BE ORDERED AS PART OF GEARCASE HARDWARE KIT #K11236.
- B) THIS PART CAN ONLY BE ORDERED AS PART OF GEARCASE BEARING KIT #K11318.
- C) THIS PART CAN ONLY BE ORDERED AS PART OF SEAL KIT #K11319.
- D) FOR BOTH SEALS & SHIMS, ORDER SEAL & SHIM KIT #K11320.
- E) THIS PART CAN ONLY BE ORDERED AS PART OF HOIST HARDWARE KIT K11251.

BC-Twin Hook W/O Spur Gears Monorail Gearcase Assembly Parts List Sheet 2 of 2


## Type 'A', 'B', and 'BC' Hoist Gearbox

## Notes:

- 1. Required components: 518 Gasket Eliminator, 565 Pipe Sealant, 598 RTV, and 7649 Primer
- 1. All metal surfaces to be cleaned with brake cleaner, acetone, or Loctite Cleaner/Degreaser. After cleaning, all surfaces will be wiped down and dried.
- 2. All Loctite sealants, retaining compounds, and gasket eliminators require 3 hours to set and 24 hours to fully cure. None of these materials should come into contact with oil or grease before this time.

Issue 1, 5/28/15

4. Apply 518 Gasket Eliminator in a continuous bead, circling each bolt hole as shown. Do not spread.

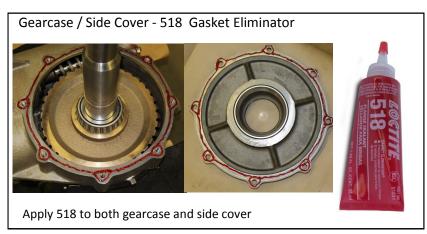











Note:

Spray both sides of the shim 'stack' with Loctite 7649 Primer.
There is no need to spray each shim individually.



